

Clytze Series LED High Bay



Optical Performance

Lumens: 11000lm-22000lm
CCT: 3500K, 4000K, 5000K
Fixture Efficacy: >110lm/W

Electrical Specifications

Wattage: 100W-200W
Power Input: AC100-277V 47-63Hz
Power Factor: >0.93



Great Features

- Equivalent to 250W, 400W and 700W HID.
- Private tooling and compact design.
- Original Nichia LED from Japan and Mean Well driver from Taiwan.
- LED efficacy > 140lm/W, system efficacy > 110lm/W.
- IP65 weatherproof.
- Elegant metal nameplate on product.
- Multiple installations: loop hanging, pole hanging, ceiling mount, wall mount.
- Dimming, Dali control, Microwave motion sensor and Daylight harvesting functions available.
- 5 year warranty.



Black



White



Silver



ADD: 2nd Building Dingfeng High-Tech Zone, Fuyuan 1st Road, Fuyong Sub-district, Bao'an District, Shenzhen, China.

Tel: +86-755-29197332

Fax: +86-755-29197301


E-mail: info@agcled.com

Product Specification

LED Type: Nichia LED
 CCT: 3500K, 4000K, 5000K
 System Efficacy: > 110lm/W
 CRI: 73 standard (83 optional)
 Beam Angle: 50°, 120°
 IP Level: IP65

Model	Power	Luminous Flux @5000K CRI73	HID Replacement	Net Weight	Product Dimension
AGC-HB01-100	100W	> 11000lm	250W	6.7kg	Ø383x193mm
AGC-HB01-120	120W	> 13200lm	250W-400W	6.7kg	Ø383x193mm
AGC-HB01-150	150W	> 16500lm	400W-600W	6.7kg	Ø383x193mm
AGC-HB01-200	200W	> 22000lm	700W	7.3kg	Ø383x203.5mm

Structure

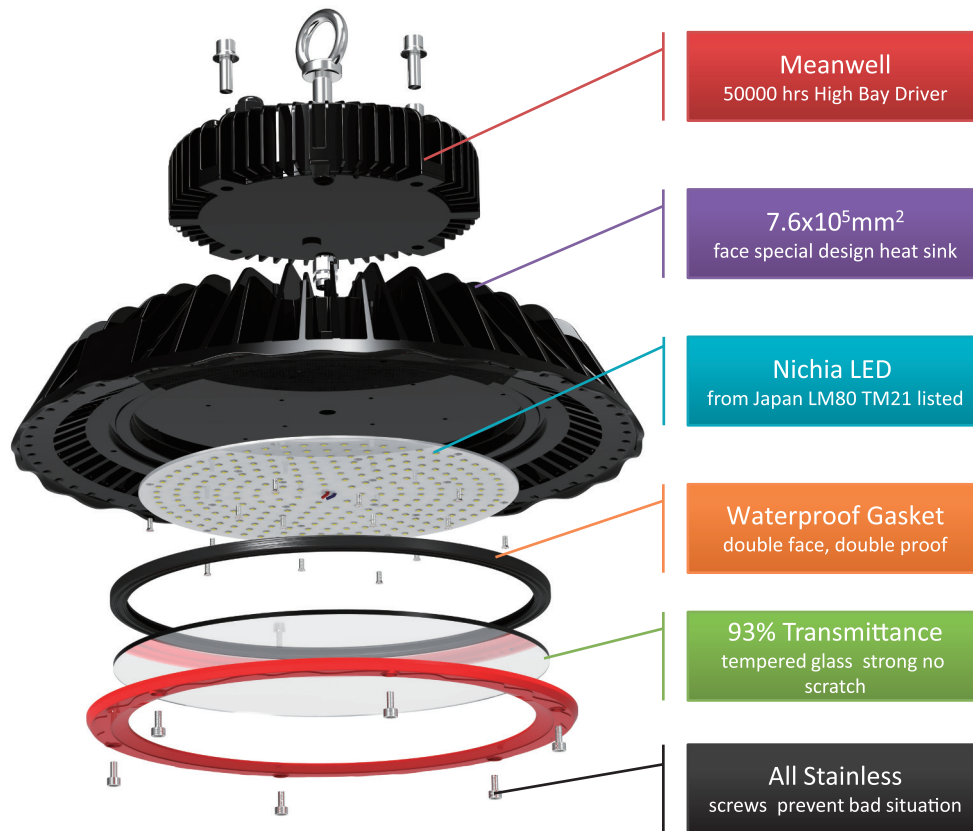

Intelligent control options



Installation options

