


ESD Curtain

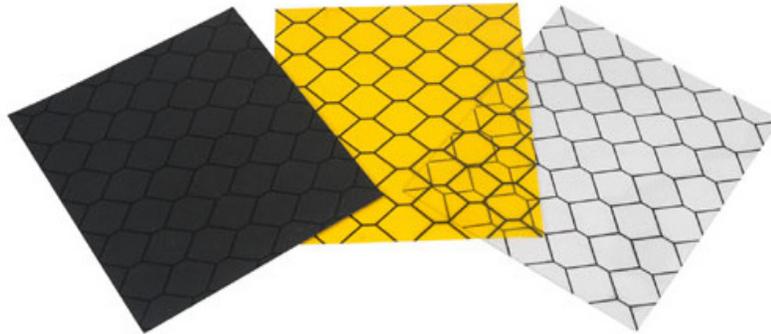

Type: Grid, Transparent, Black

Material: PVC

Characteristics: soft, transparent, flame retardant and difficult to aging

Functions: purification, anti-static, at the temperature, noise, vehicle-free passage

Surface resistance:

Printing surface resistance: $2.5 \times 10^6 \Omega$

Un-printing surface resistance: $4 \times 10^7 \Omega$

Roll size: 1.37m x 30m

Thickness: 0.3mm, 0.5mm, 1.0mm, 2.0mm optional

Scope of application: apply to electronics, foodstuffs, pharmaceuticals, refrigeration and other industries, the electronics industry is particularly applicable to the purification plant, and so on.

Use: according to the actual needs cutting, laying on the ground, or do shutter curtain wall can be.

Day-to-day maintenance: wipe with a dry cloth, wipe or not soaking wet, but also prohibited from using cleaning agents, such as alcohol.

Use Duration: two years Conductive fabric or vinyl for upholstered components

HORB Tech Development Co., Ltd

Tel: 0086-755-29238429

Fax: 0086-755-29461424

Website: www.horb.com.cn

ISO 9001: 2000 Certified